



A+

F

4,2


345

2700K

15 000h

4  
YEARS  
GUARANTEE

## General Data

Article No.	43819302
Code	RL-MR11 35 827/WFL
Product EAN	4008597193026
Customs tariff no.	85395200
Box quantity (pcs.)	10
EAN Box	4008597493027
Gross weight of box in kg	0.294
Length of box in m	0.188
Width of box in m	0.078
Height of box in m	0.055
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Weight	22 g
Product status	 Phase Out

## Electric Parameters

Rated wattage	4.2 W
Nominal power	4,2 W

## Electric Parameters

Weighted energy consumption in 1,000 hours	5 kWh
Power factor	> 0.50
Nominal voltage	12-12 V
Voltage type	AC
Nominal current	500-500 mA
Nominal current (mA)	500 mA
max. no. of Lps with 10A (B) circuit breaker with ballast (ECG, CCG no capacitor) / at mains	40
max. no. of Lps with 16A (B) circuit breaker with ballast (ECG, CCG no capacitor) / at mains	50
dimnable	No

## Light Application Parameters

Luminous flux	345 lm
Rated lamp luminous flux	345 lm
Luminous flux nominal	345 lm
Luminous flux in 90°-sector	345 lm lm
Luminous flux in 120°-sector	345 lm lm
Luminous intensity	600 cd
Beam angle	36 °
Luminous efficiency	82 lm/W
Color temperature	2700 K
Color rendering index Ra	≥ 80
Color rendering index Ra nominal	80-89
Color Stability	≤ 6 sdc <sub>m</sub>

## Service Life

Average nominal lifespan	15000 h
Mean service life	15000 h
No. switching cycles	100000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee	4 years

## Specification

Energy Label A to G	F
Energylabel A++ to E	A+
Diameter	35 mm

## Specification

Length max.	38 mm mm
Length	38 mm
Burning position	beliebig
Mercury content	0.0 mg
Lamp shape	Reflector
Base	GU4
Colour	White

## Notes on Operation

Degree of protection (IP)	IP20
Burning position	beliebig
Ambient temperatures	-20...+40 °C

## Information especially for EPREL

Lighting technology	LED
Color tunable light source	No

## Notes

MR11-LED for exchange with 12V halogen lamps, warm white light, glass body, non-dim, base GU4. LED light does not contain UV or IR radiation.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Base



GU4  
IEC/EN 60061-1  
sheet 7004-108-2

### Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

# LED low voltage retrofit

RL-MR11 35 4W/12/827/WFL/GU4

# Radium

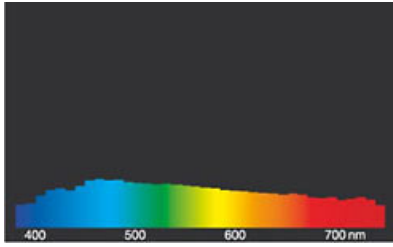

daylight(D 65)

## Special features



## General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.