

FLOS


F3743000 Glass

Luce Orizzontale S1 NEW

Designed by Ronan & Erwan Bouroullec, 2022

110W - 5345lm - 2700K - CRI> 95

Suspended lamp consisting of interconnected glass modules that reach a length of 1.66 mt. (S1) 2.07 mt. (S2) 2.49 mt. (S3) with 2.70 m suspended power cable. The cylindrical transparent glass modules are created through an artisanal process by pouring the glass into a rotating mold to obtain an exclusive finish that makes each single piece unique. Internal structure in polished extruded aluminum equipped with two linear LED modules for direct and indirect lighting downwards. The modules can be easily removed and replaced in case of maintenance. The power supply unit and the Dali Dimmer are located within the ceiling rose while a touch control button, positioned on one end of the product, allows the luminaire to be controlled in three different modes. Control options available: TOUCH_ Features direct control via the touch button on the lamp. This option allows to dim and adjust the light intensity of both the up and down emission (individually or combined) from 10% to 100%. PUSH&TOUCH_ Features remote on/off control via Push button as well as dim and adjustability of the light tensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp. DALI&TOUCH_ Features remote on/off control via DALI DT6 as well as dim and adjustability of the light tensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp.

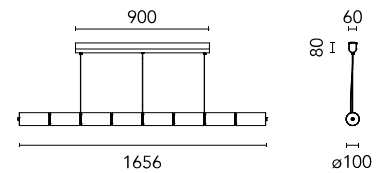

Download

Mounting instructions



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class F

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Number of heads	1
Power (W)	110
System flux (lm)	5345

Physical

Colour	Glass
Cord length (mm)	2700
Canopy dimension (mm)	78
Canopy width (mm)	900
Canopy height (mm)	61
Net weight (kg)	27.95
Package volume (m3)	0.18
IP internal	20

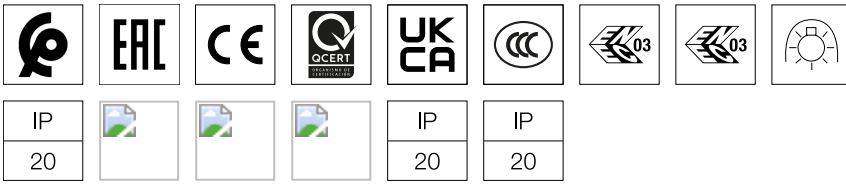

Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED voltage Vf (Vdc)	null
LED current (mA)	500
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmer on board
Dimming interface	Dimmer Integrated

Spare Parts



00.	Assembly Accesories for Luce Orizzontale S1	RF3746800
01.	Led Board for Luce Orizzontale S1	RF3746700
02.	Suspensión Ring Wiring 4m for Luce Orizzontale	RF3746200
03.	Closed Glass Difusser for Luce Orizzontale	RF3746300
04.	Open Glass Difusser for Luce Orizzontale	RF3746400
05.	Linear Difusser Luce Orizzontale S1	RF3746500
06.	Assembly Driver fot Luce Orizzontale	RF32976
08.	Rose for Luce Orizzontale S1-S2 White	RF3746600

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746800

Assembly Accessories for Luce Orizzontale S1

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746700

Led Board for Luce Orizzontale S1

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746200

Suspensión Ring Wiring 4m for Luce Orizzontale

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746300

Closed Glass Difusser for Luce Orizzontale

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746400

Open Glass Difusser for Luce Orizzontale

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746500

Linear Difusser Luce Orizzontale S1

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF32976

Assembly Driver fot Luce Orizzontale

The word "FLOS" in a large, black, serif font, centered within a square frame.

RF3746600

Rose for Luce Orizzontale S1-S2 White