

# FLOS


F3744000 Glass

## Luce Orizzontale S2 NEW

Designed by Ronan & Erwan Bouroullec, 2022

145W - 6682lm - 2700K - CRI> 95

Suspended lamp consisting of interconnected glass modules that reach a length of 1.66 mt. (S1) 2.07 mt. (S2) 2.49 mt. (S3) with 2.70 m suspended power cable. The cylindrical transparent glass modules are created through an artisanal process by pouring the glass into a rotating mold to obtain an exclusive finish that makes each single piece unique. Internal structure in polished extruded aluminum equipped with two linear LED modules for direct and indirect lighting downwards. The modules can be easily removed and replaced in case of maintenance. The power supply unit and the Dali Dimmer are located within the ceiling rose while a touch control button, positioned on one end of the product, allows the luminaire to be controlled in three different modes. Control options available: TOUCH\_ Features direct control via the touch button on the lamp. This option allows to dim and adjust the light intensity of both the up and down emission (individually or combined) from 10% to 100%. PUSH&TOUCH\_ Features remote on/off control via Push button as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp. DALI&TOUCH\_ Features remote on/off control via DALI DT6 as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp.

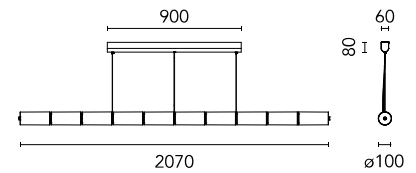

### Download

Mounting instructions




Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

## Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	145
System flux (lm)	6682

## Physical

Colour	Glass
Cord length (mm)	2700
Canopy dimension (mm)	78
Canopy width (mm)	900
Canopy height (mm)	61
Net weight (kg)	34.5
Package volume (m3)	0.22
IP internal	20

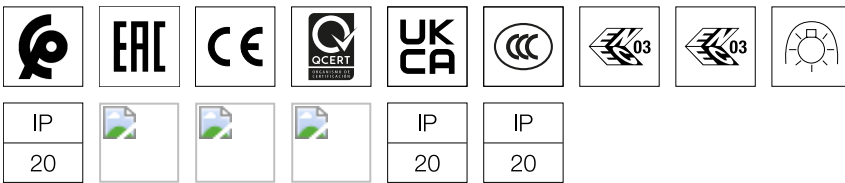

## Photometric

Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No


## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED voltage Vf (Vdc)	null
LED current (mA)	600
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmer on board
Dimming interface	Dimmer Integrated


## Spare Parts




- |     |  |           |
|-----|--|-----------|
| 10. | Assembly Driver fot Luce Orizzontale           | RF32976   |
| 30. | Suspensión Ring Wiring 4m for Luce Orizzontale | RF3746200 |
| 40. | Closed Glass Difusser for Luce Orizzontale     | RF3746300 |
| 50. | Open Glass Difusser for Luce Orizzontale       | RF3746400 |
| 60. | Rose for Luce Orizzontale S1-S2 White          | RF3746600 |
| 70. | Assembly Accesories for Luce Orizzontale S1    | RF3747300 |
| 80. | Linear Difusser Luce Orizzontale S2            | RF3747200 |



RF32976  
Assembly Driver fot Luce  
Orizzontale



RF3746200  
Suspensión Ring Wiring 4m for  
Luce Orizzontale




RF3746300  
Closed Glass Difusser for Luce  
Orizzontale



RF3746400  
Open Glass Difusser for Luce  
Orizzontale



RF3746600  
Rose for Luce Orizzontale S1-S2  
White



RF3747300  
Assembly Accesories for Luce  
Orizzontale S1



RF3747200  
Linear Difusser Luce Orizzontale  
S2