

FLOS


F3745000 Glass

Luce Orizzontale S3 NEW

Designed by Ronan & Erwan Bouroullec, 2022

165W - 8018lm - 2700K - CRI> 95

Suspended lamp consisting of interconnected glass modules that reach a length of 1.66 mt. (S1) 2.07 mt. (S2) 2.49 mt. (S3) with 2.70 m suspended power cable. The cylindrical transparent glass modules are created through an artisanal process by pouring the glass into a rotating mold to obtain an exclusive finish that makes each single piece unique. Internal structure in polished extruded aluminum equipped with two linear LED modules for direct and indirect lighting downwards. The modules can be easily removed and replaced in case of maintenance. The power supply unit and the Dali Dimmer are located within the ceiling rose while a touch control button, positioned on one end of the product, allows the luminaire to be controlled in three different modes. Control options available: TOUCH_ Features direct control via the touch button on the lamp. This option allows to dim and adjust the light intensity of both the up and down emission (individually or combined) from 10% to 100%. PUSH&TOUCH_ Features remote on/off control via Push button as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp. DALI&TOUCH_ Features remote on/off control via DALI DT6 as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp.

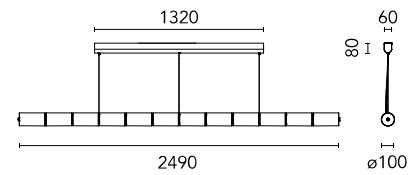

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Number of heads	1
Power (W)	165
System flux (lm)	8018

Physical

Colour	Glass
Cord length (mm)	2700
Canopy dimension (mm)	78
Canopy width (mm)	1316
Canopy height (mm)	61
Net weight (kg)	41
Package volume (m3)	0.26
IP internal	20

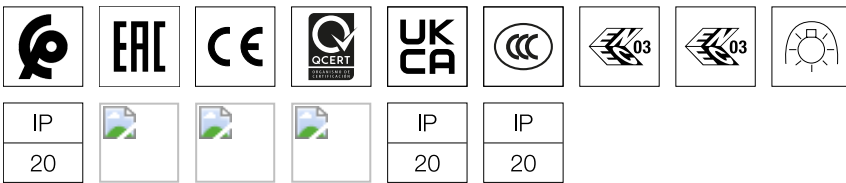

Photometric

Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED voltage Vf (Vdc)	null
LED current (mA)	700
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmer on board
Dimming interface	Dimmer Integrated

Spare Parts



- | | | |
|-----|--|-----------|
| 10. | Assembly Driver fot Luce Orizzontale | RF32976 |
| 30. | Suspensión Ring Wiring 4m for Luce Orizzontale | RF3746200 |
| 40. | Closed Glass Difusser for Luce Orizzontale | RF3746300 |
| 50. | Open Glass Difusser for Luce Orizzontale | RF3746400 |
| 60. | Led Board for Luce Orizzontale S2 | RF3748400 |
| 70. | Linear Difusser Luce Orizzontale S3 | RF3748200 |
| 80. | Rose for Luce Orizzontale S3 White | RF3748300 |



RF32976
Assembly Driver for Luce
Orizzontale



RF3746200
Suspensión Ring Wiring 4m for
Luce Orizzontale




RF3746300
Closed Glass Difusser for Luce
Orizzontale



RF3746400
Open Glass Difusser for Luce
Orizzontale



RF3748400
Led Board for Luce Orizzontale
S2



RF3748200
Linear Difusser Luce Orizzontale
S3



RF3748300
Rose for Luce Orizzontale S3
White