

# Limbus M

design Emanuele Ricci, 2019



release 2019, December



Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.  
The metal parts are made in lathed aluminium  
1-10V dimming or DALI dimming compatible (AC-DC converter required)

## Finishing

### Standard

-  Anodised black  
cod. 190M01X000
-  Anodised brass  
cod. 190M50X000

All RAL coating and galvanic finishes available upon request

## Light emission



- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 233 lm
- Efficacy: 39 lm/W:
- CCT: 3000K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

## Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

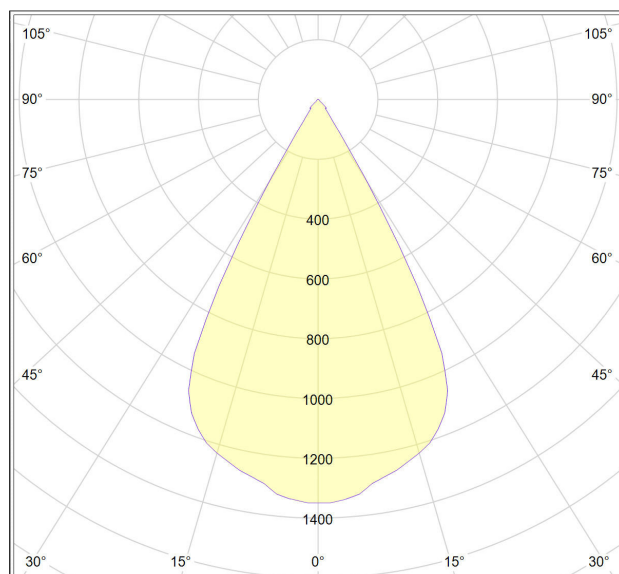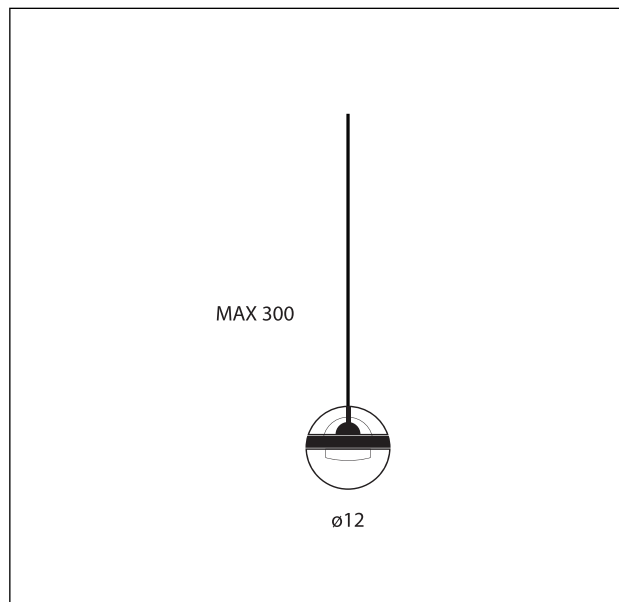

Packaging  
cardboard box  
21 x 21 x 27 (cm)  
0,012 m<sup>3</sup>

Gross weight  
2,7 Kg

# Limbus M

design Emanuele Ricci, 2019


release 2019, December




Suspension with diffuser made of pressed glass very accurately shaped, working as an optical lens.  
The metal parts are made in lathed aluminium  
1-10V dimming or DALI dimming compatible (AC-DC converter required)

## Finishing

### Standard

 Anodised black  
cod. 190M01XOK27

 Anodised brass  
cod. 190M50XOK27

All RAL coating and galvanic finishes available upon request

## Light emission



- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 221 lm
- Efficacy: 37 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

## Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 2 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

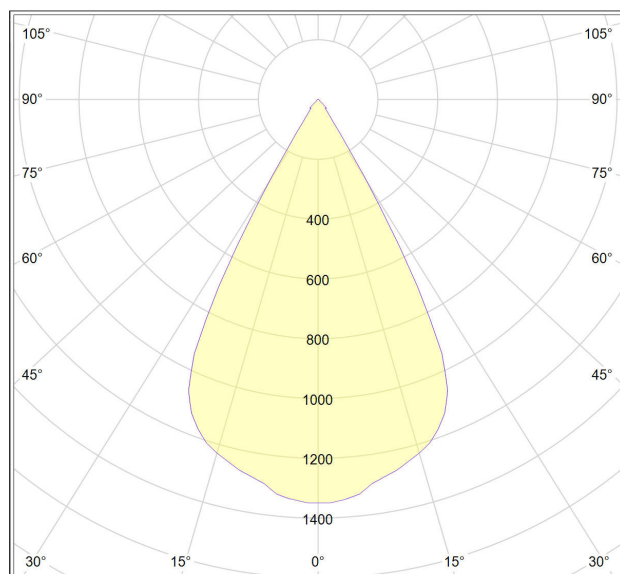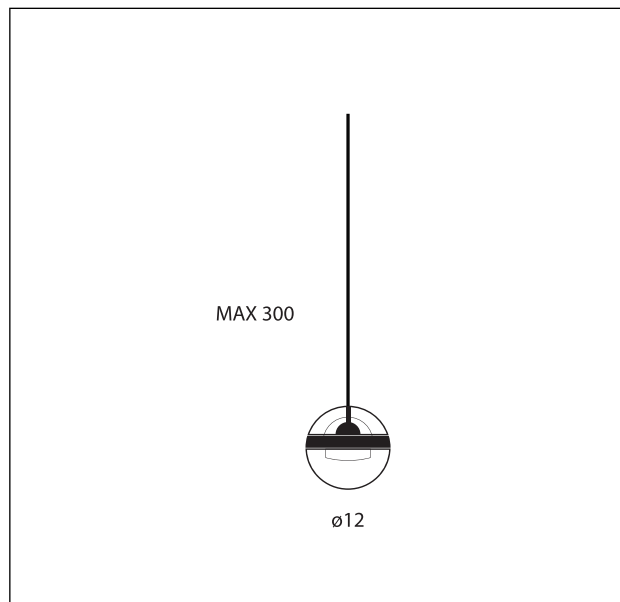

Packaging  
cardboard box  
21 x 21 x 27 (cm)  
0,012 m<sup>3</sup>

Gross weight  
2,7 Kg