

TW LEDDim Smart Pill



220-240V, 50Hz (NOT 60Hz*), 3-200VA, -20°C to 35°C,
Operating frequency: 2402-2480MHz, maximum radio-frequency output power: 2dBm
*60Hz upon request

Range

Mesh Grid Function

SG Smart App

Min. Android 10 - 4GB RAM

Min. iOS 14 - iPhone 11

www.sg-as.com/sg-smart-app-guide

Independent

0-1s

>1s

L ——— P
Max 50m

2x

Built-in

0-1s

>1s

L ——— P
Max 50m

2x

NORWAY
SG Armaturen AS

Skytterheia 25
N-4790 Lillesand

Tel: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

SWEDEN
SG Armaturen AB
Tel: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

FINLAND
SG Armaturen Oy
Tel: +358 02 07 30 39 60
info@sg-oy.fi
www.sg-oy.fi

DENMARK
SG Armaturen A/S
Tel: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk

UNITED KINGDOM
SG Lighting LTD
Tel: +47 37 50 03 00
info@sglighting.co.uk
www.sglighting.co.uk

FRANCE
SG Lighting SA/NV
Tel: +33(0) 4 94 93 00 00
info.france@sglighting.fr
www.sglighting.net

BENELUX
SG Lighting SA/NV
Tel: +32(0) 15 20 72 71
info.benelux@sglighting.net
www.sglighting.net



GERMANY
SG Leuchten GmbH
Tel: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de

INTERNATIONAL
SG Lighting Co Ltd.
Tel: +86 769 88 49 20 88
cindy@sgdgc.com
www.sg-as.com

Rev: 20.10.2022





			
	Max.160W		

Maximum number of luminaires: 11

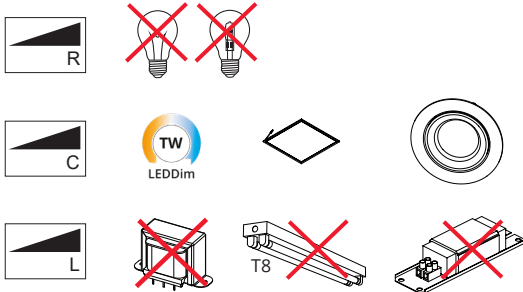


NO: Minimum dimmenivåjustering
DA: Minimum justering af dæmpningsniveau
SE: Minsta justering av dimningsnivå
EN: Minimum dimming level adjustment
FR: Réglage du niveau de gradation minimal
NL: Regelbaar niveau van minimale dimmingsgraad
DE: Anpassung der minimalen Dimmstufe
FI: Minimi himmennystaso



Reset

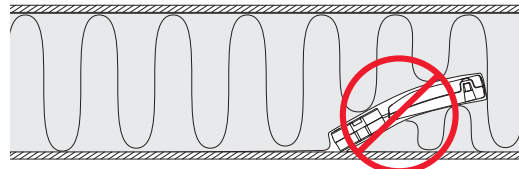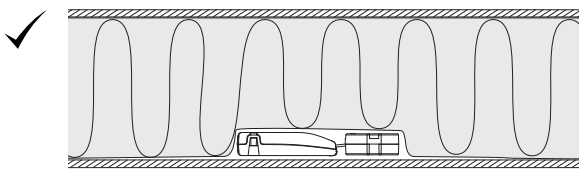


Pairing

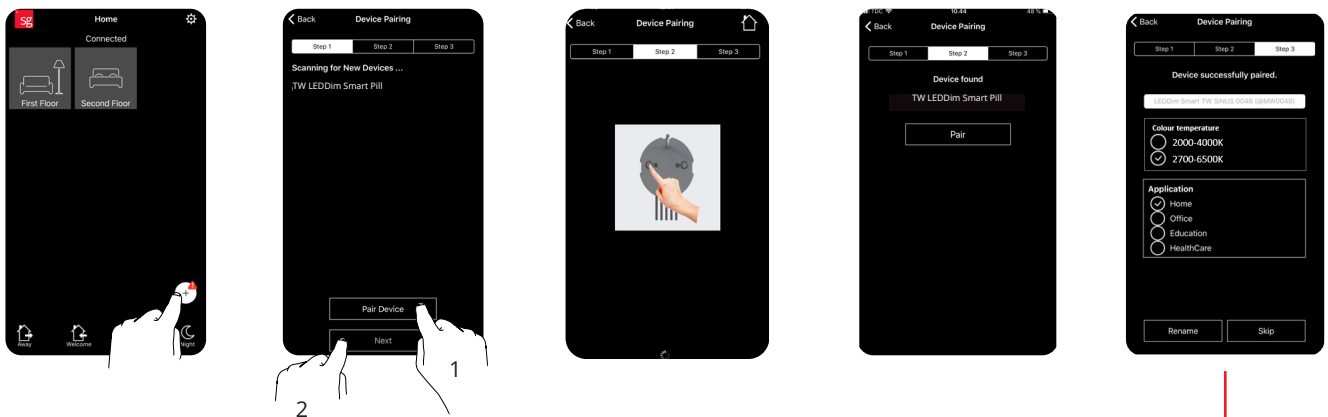


2000-4000K			Home			Education			Office			Healthcare		
Ambient	2000K	20%	Ambient	2700K	20%	Relax	3000K	50%	Presentation	3000K	30%	Relax	3000K	50%
Relax	2200K	40%	Relax	2700K	40%	Dialogue	4000K	70%	Dialogue	4000K	70%	Dialogue	4000K	70%
Read	2700K	100%	Read	3000K	100%	Concentration	4525K	100%	Concentration	4525K	100%	Concentration	4525K	100%
Bright	4000K	100%	Bright	4000K	100%	Energy	6500K	100%	Energy	6500K	100%	Energy	6500K	100%





Customise preset

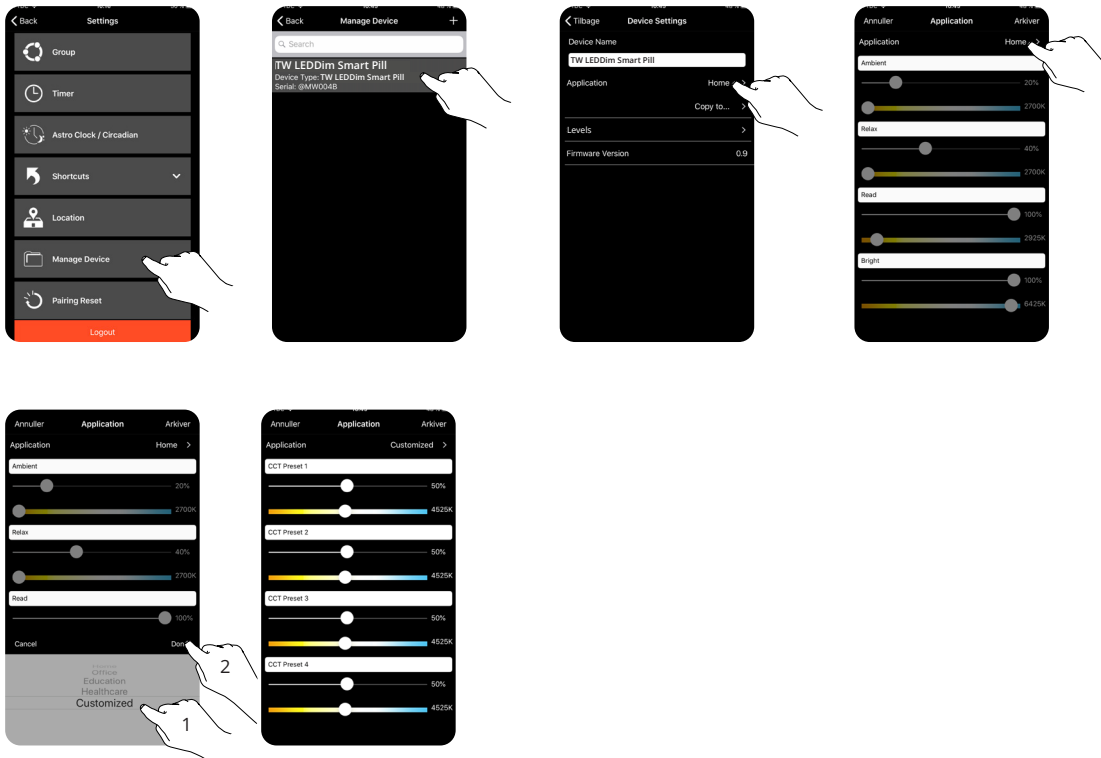

Levels

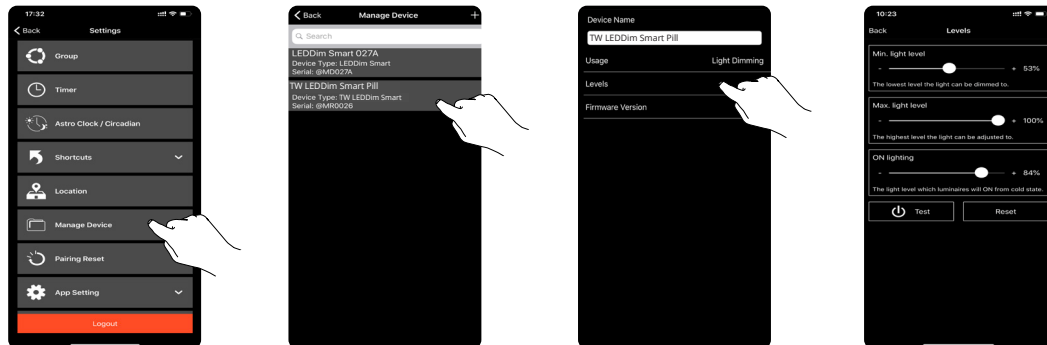


Circadian

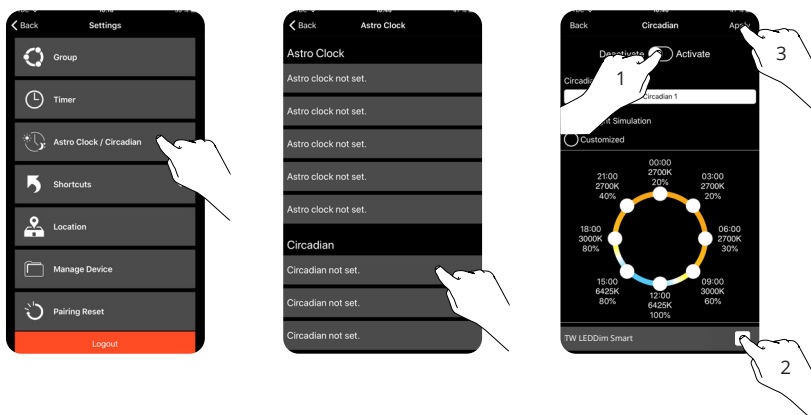

Use with SG Smart Gateway

Circadian Customized

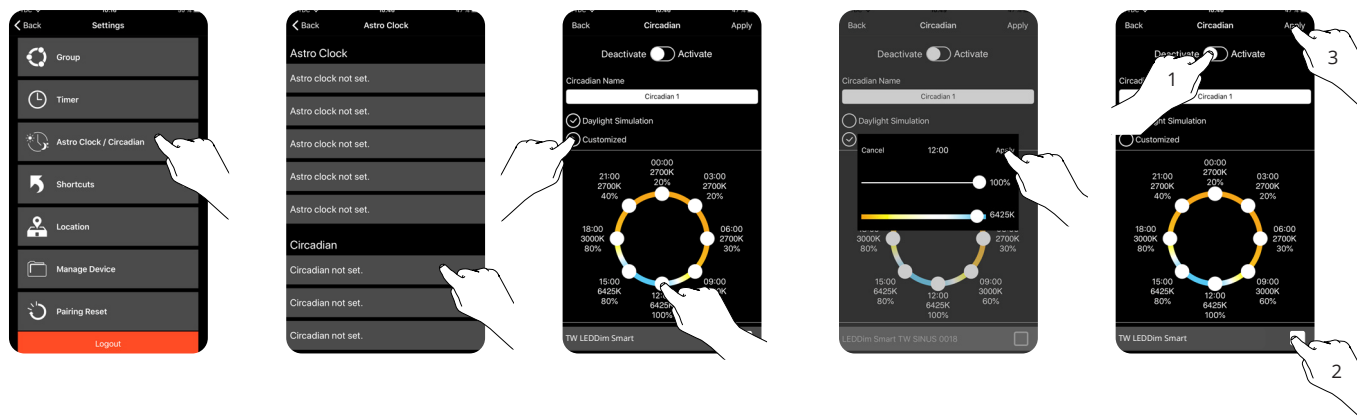

NO: Kan kun installeres og vedlikeholdes av en registrert installasjonsvirksomhet.

DK: Må kun installeres og vedligeholdes af uddannet elektriker.

SE: Skall installeras och underhållas av behörig elektriker.

EN: Only to be installed and maintained by an authorized electrician.

FR: Doit être installé et maintenu par un électricien qualifié.

NL: Mag alleen geïnstalleerd en onderhouden worden door een bevoegde elektricien.

DE: Dieses Produkt darf nur durch autorisiertes Personal (z.B. Elektro-Installateur) angeschlossen, in Betrieb genommen und gewartet werden.

FI: Asentaa ja huoltaa saa vain valtuutettu sähköasentaja

NO: Skru av strømmen før montering.

DK: Sluk for strømmen inden montering.

SE: Stäng av strömmen innan montering.

EN: Turn off power before installing.

FR: Couper le courant avant l'installation.

NL: Stroom uitschakelen voor u het toestel installeert.

DE: Vor Installationsarbeiten den Strom abschalten.

FI: Sammuta virta ennen kytkemistä