LedsC4

Product Code
05-9911-Z5-CL

Installation Instructions
3D File
Photometry
Revit (BIM)

Afrodita LED 220mm Double Emission

LedsC4 Team

Wall fixture IP66 Afrodita LED 220mm Double Emission LED 17.9 LED warm-white 3000K ON-OFF Urban grey 1528lm

Technical features

Luminaire total power: 17.9W
Real lumens: 1528
Real lm/W: 85
Correlated Colour Temperature (CCT): LED warm-white 3000K
Lens / reflector angle: FLOOD 91°
Structure material: Aluminium
Structure finish: Urban grey
Diffuser material: Glass
Diffuser finish: Partly-sandblasted
Voltage / frequency: 100-240V/50-60Hz
Dimming protocol: ON-OFF
Power Factor: 0.94
Useful life: 50,000h L80B20
Warranty: 5 años
Resistant to marine environments: Yes
Easily recyclable luminaire

IP66 IK04 | BREEAM | RF 850°C | E A-G

Luminotechnic features

Melanopic ratio: 0.501
CRI: 80
MacAdam steps: 3
Photobiological risk: RG0
UGR crosswise: 19.0
UGR lengthwise: 15.0

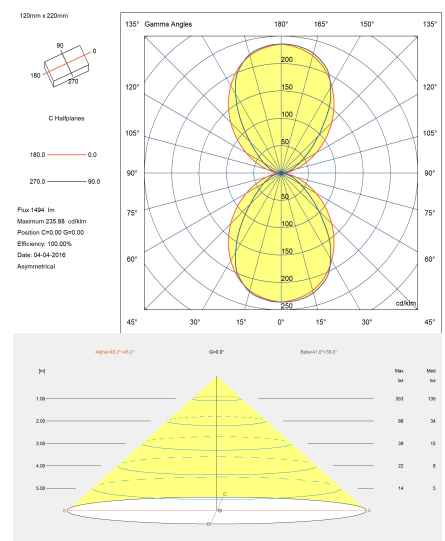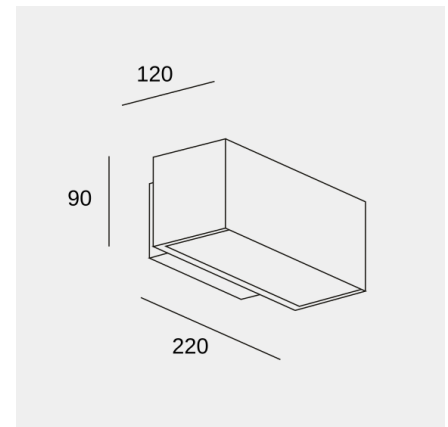| Lampholder	Quantity	Light source power (W)
LED	1	15.8W

120
90
220

120mm x 220mm

Flux 1494 lm
Maximum 235.88 cd/klm
Position C=0.00 G=0.00
Efficiency: 100.00%
Date: 04-04-2016
Asymmetrical

Afrodita LED 220mm Double Emission
05-9911-Z5-CL

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

25/07/2023
Página 1/2

LedsC4

Product Code
05-9911-Z5-CL

Installation Instructions
3D File
Photometry
Revit (BIM)

Afrodita LED 220mm Double Emission

LedsC4 Team

Wall fixture IP66 Afrodita LED 220mm Double Emission LED 17.9 LED warm-white 3000K ON-OFF Urban grey 1528lm

Logistics

x 4

Net weight (kg): 1.48
Packaged weight (kg): 1.57
Packaging: 230mm x 130mm x 100mm

Light application

Afrodita LED 220mm Double Emission
05-9911-Z5-CL

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

25/07/2023
Página 2/2