



Lampio 1


Design by Stéphane Joyeux



Lampio 1



Lampio 2



Lampio 4






Lampiok 1

IP65 (lantern)
Class 2
Class 1 (models 7 and 8)

Aluminium or tinted lacquered brass or patinated lacquered copper
Cup, rod, bracket and pole: black grey 107 (RAL 7021)
Clear or frosted glass diffuser



SOURCE

E27 - 52W max Ø68 mm - H150 mm max



E27 (2450 lm)
Real light output/frosted - 1558 lm
Real light output/clear - 1673 lm

MODELS

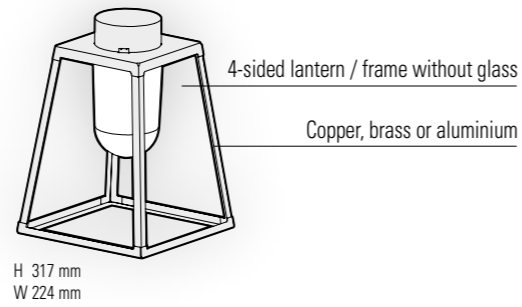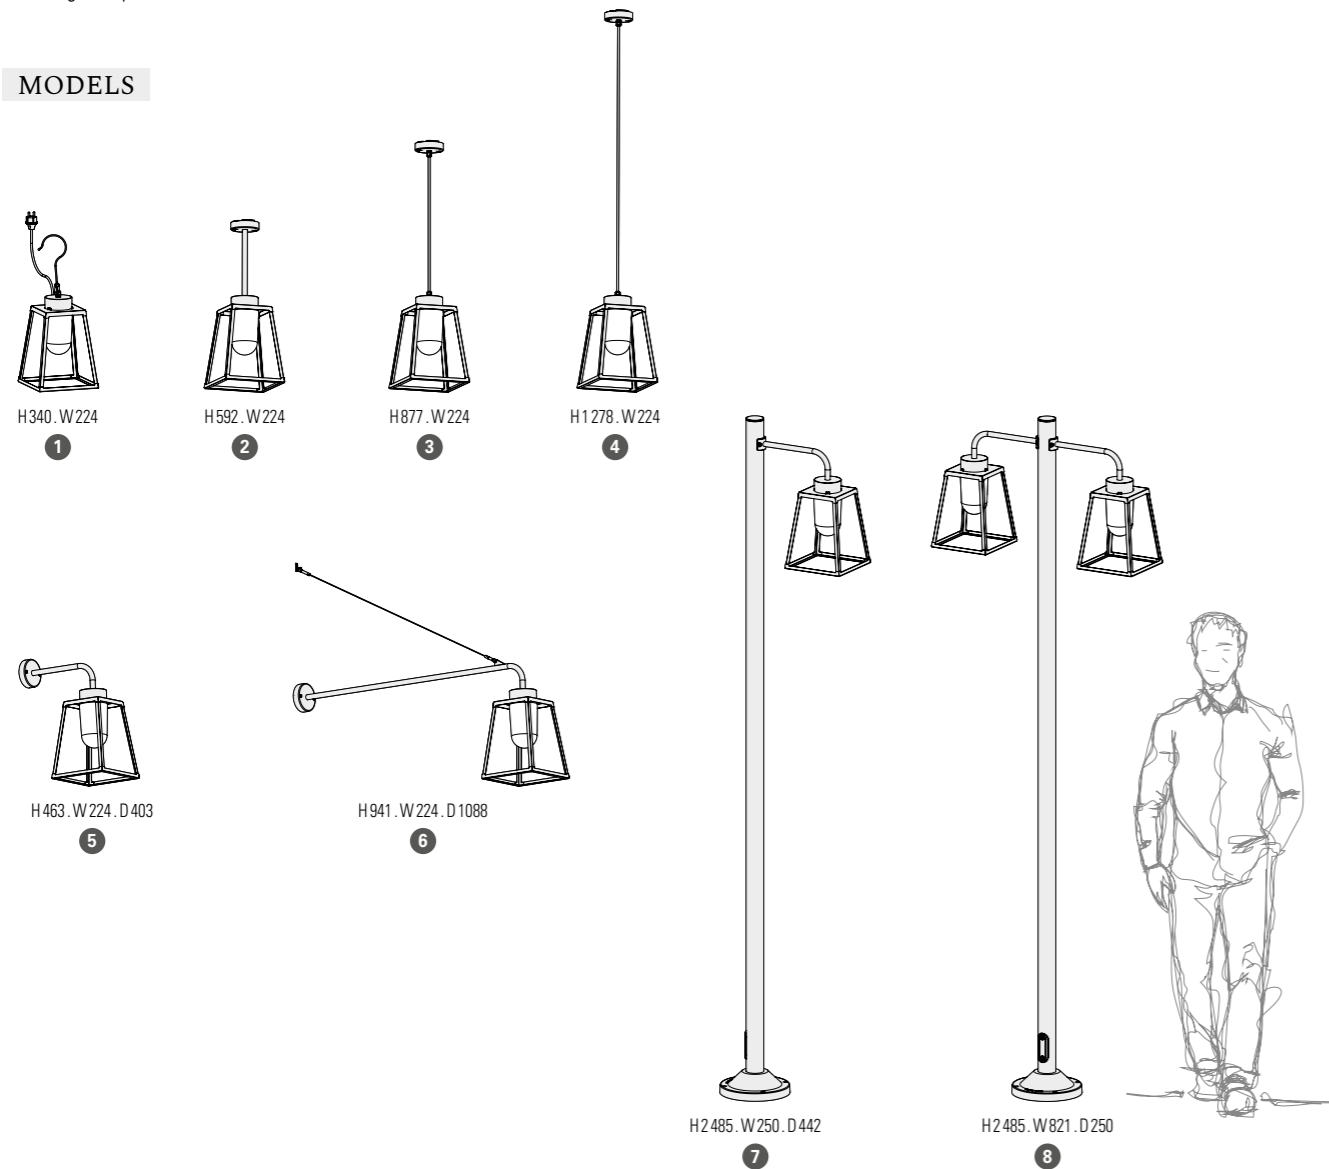

Lampiok 1

REFERENCES

Replace ●●● with the colour code or the material code/ replace (●) with the country's electrical plug code

MODELS	DIFFUSERS	E27	CORNER PLATE	SPARE DIFFUSERS
1	CLEAR GLASS	131 001 ●●●(●)		165 035 609
	FROSTED GLASS	131 002 ●●●(●)		165 035 610
2	CLEAR GLASS	131 003 ●●●		165 035 609
	FROSTED GLASS	131 004 ●●●		165 035 610
3	CLEAR GLASS	131 005 ●●●		165 035 609
	FROSTED GLASS	131 006 ●●●		165 035 610
4	CLEAR GLASS	131 007 ●●●		165 035 609
	FROSTED GLASS	131 008 ●●●		165 035 610
5	CLEAR GLASS	131 009 ●●●	147 005 ●●●	165 035 609
	FROSTED GLASS	131 010 ●●●		165 035 610
6	CLEAR GLASS	131 011 ●●●		165 035 609
	FROSTED GLASS	131 012 ●●●		165 035 610
7	CLEAR GLASS	131 013 ●●●		165 035 609
	FROSTED GLASS	131 014 ●●●		165 035 610
8	CLEAR GLASS	131 015 ●●●		165 035 609
	FROSTED GLASS	131 016 ●●●		165 035 610

COLOURS CODES

Replace ●●● with the colour code ↴

	RAL 7021 BLACK GREY 107		RAL 3013 TOMATO RED 110
	RAL 7044 SILK GREY 105		RAL 2004 PURE ORANGE 014
	RAL 9010 PURE WHITE 101		RAL 1016 SULFUR YELLOW 068
	BLUE 111		RAL 6025 FERN GREEN 109

Other colours on request

MATERIAL CODES

	TINTED LACQUERED BRASS 070
	PATINATED LACQUERED COPPER 080

With cup, rod, bracket and pole Black grey 107 (RAL 7021) for all materials

PLUGS CODES

The standard Roger Pradier® plugs are SCHUKO plugs type F
Except for French plugs, replace (●) with the country's plug code ↴

	UK PLUG UK type G		SWISS PLUG CH type J
--	----------------------	--	-------------------------

MOUNTING

Wiring entry points in grey - Fixing kit included

