

# FLOS


FA1051740070 Anodized Aluminium

## Aimer 3 Rgb NEW

Designed by FLOS Outdoor



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

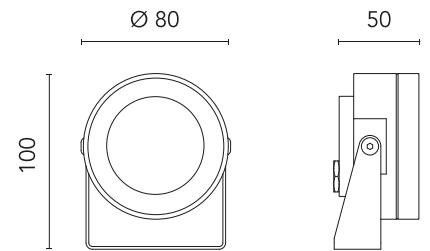

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling, Wall, Ground
Environments	Outdoor wet location
LED type	Power LED
Number of heads	1
Power (W)	3.4
System power (W)	3.4

### Physical


Colour	Anodized Aluminium
Orientation	Directional
Longitudinal tilting (°)	185
IP internal	66/67

### Download


Mounting instructions

[ZIP](#)

### Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	RGB

## Electrical

Insulation class	III
Main voltage (Vac)	3CHx350MA
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable DMX
Emergency type	No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---

## Accessories & Power Supply



OPTIONAL  
Accessory

F990B10A000


DMX controller; dimmer switch for recessed box (60mm hole centres)



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc interface.



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair with 110 Ohm constant impedance



OPTIONAL  
Accessory

FA5130

Visor for Aimer 3



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B22A000

Power supply with DMX interface for RGB fixtures 36W/220÷240v-3CH x 350mA (3CH x 10 x 1W) DMX control allowed IP67 Class I Selv Eq.