


## AROA with acrylic glass diffuser Pendant lamps

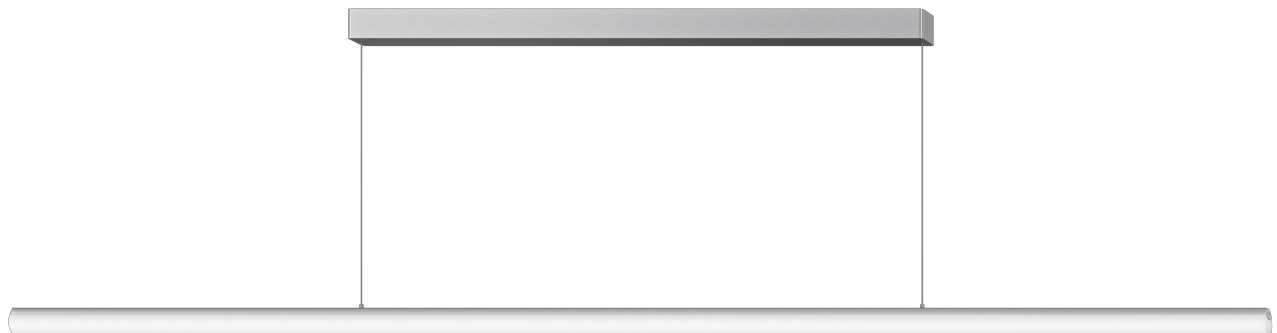

### Product description

Art. No.: 4131.150.27.0 DIG

Product name: AROA pendant lamp

Housing colour: natural anodised

Material: Extruded aluminium

Equipment: For mounting on the ceiling, 2 nickel-plated copper cables, transparently sheathed length 2500 mm, continuously adjustable height

Dimensions (mm): 1500 x 28 x 32

Optics/light technology: acrylic glass diffuser opal

Weight (kg): 1.72

Protection level: IP 20

Protection class: I

Control gear: PS 230 V/50 Hz (in a separate housing)

Lighting control: DALI/TouchDIM

### Light specification/technical data

Lamp: LED

System power (W): 29

Light flux (lm/lamp): 3070

Luminous efficiency (lm/W): 106

Colour temperature (K): 2700

Colour rendering index (CRI): >90

Unified glare rating (UGR): 25

Light distribution: All-round beam

Lifetime: 50'000h L90 B10 (Ta 25° C)


Energy efficiency: D

Colour consistency (MacAdam): 3


**Specification text/Description:** Article: 4131.150.27.0 DIG; Article name: AROA pendant lamp; Description: With perfect workmanship and sleek, classic design, the delicate lamp offers a particularly wide range of applications. The splash-proof mounted lamp with external control gear is also suitable for use in wet locations. A perforated metal diffuser that clips on is an optional accessory for perfect anti-glare.; Color: natural anodised; Optics: acrylic glass diffuser opal; Light control: DALI/TouchDIM; Watt: 29W; Kelvin: 2700K; Lumen: 3070lm/lamp; Materialisation: aluminium; Control gear: control gear 230 V/50 Hz; CRI: >90; Protection class: I; Protection level: IP 20; UGR: 25; Weight (incl. packaging): 1,72kg; Length: 1500mm; Dimension: 1500 x 28 x 32mm

### Drawings

Art. No.: 4131.150.27.0 DIG

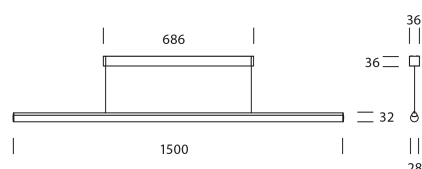

**Light distribution**



C90/C270 ———  
C0/C180 ■■■■■ cd./1000 lm

**Specifications**

