

Logistic Data

Article No.	42614808
Code	RL-RAL2 35 827/O
Product EAN	4008597148088
Customs tariff no.	85395000
Box quantity (pcs.)	10
EAN Box	4008597448089
Gross weight of box in kg	1.331
Length of box in m	0.36
Width of box in m	0.2
Height of box in m	0.14
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Product status	Active

Electric Parameters

Lamp power	3,5 W
Rated wattage	3.5 W
Energy Consumption kWh/1000h	3.5
Power factor	> 0,9
Nominal voltage	220-240 V
Nominal current	16 mA



Light Application Parameters

Luminous flux	260 lm
Beam angle	200 °
Luminous efficiency	74.29 lm/W
Radium light colour	warmwhite
Colour temperature	2700 K
Colour temperature	2700 K
Colour rendering index Ra	> 80
Colour Stability	≤ 6 sdc _m

Service Life

Mean service life	15000 h
Average nominal lifespan	15000 h



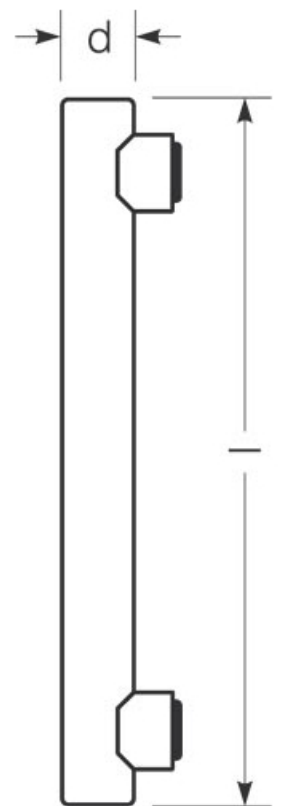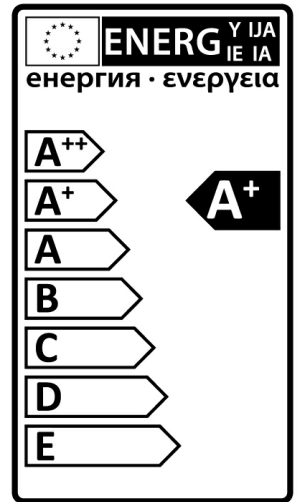

Specification

Diameter max.	29 mm
Diameter	29 mm
Length max.	300 mm
Length	300 mm
Mercury content	0.0 mg
dimnable	No
Lamp shape	Tube
Finish	opal
Degree of protection (IP)	IP20

Notes

RaLEDina, Lampe LED pour remplacement avec lampes de ligne, ampoule en verre revêtu, culot S14s. Lumière LED ne contient aucun rayonnement UV ou IR.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage. The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes

Base



S14s
IEC/EN 60061-1
sheet 7004-112-1



Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

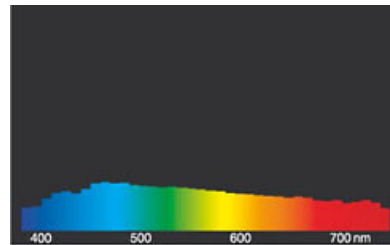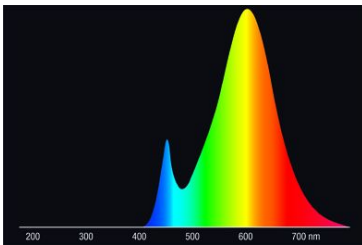

RaLEDina: LED retrofit for Linear incandescent lamp 2700K daylight(D 65)

Special features



General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.