

WIREFLOW

Design by Arik Levy.

Reference

0374.

Application

Hanging lamps

Installation type

Surface

Description

Wireflow designed by Arik Levy. A hanging lamp which reviews and updates the chandelier look through an exercise of simplification that explores its essence and enhances its outline with great delicacy and at the same time a strong formal presence. Its appearance, as a structure of fine cables finished with 43 4.5W LED terminals, discretely connects with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements.

Diffuser

Pressed-glass diffuser

Materials

Horizontal rods: Steel

Body: Aluminum


Ceiling rose: Steel

Finish



0374-04 Black lacquer (RAL 9005)

Sketch



Electrical characteristics

43 x LED 4,5W 350mA

Total 192.6 W



VIBIA



Led 2700K CRI >80 21082 lm 109 lm/W

Fixture: 8394 lm 43.37 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming DALI 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional SMART

Physical characteristics

2 Box / 0.09 x 1.62 x 1.63 m. / Vol. 0.5035 m³ /

Gross weight 57.0 kg. / Net weight 47.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 39.81%

Coordinate system : CG

Total flux : 21082.00

Maximum value : 54.85


Light position : C=40.00 G=50.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

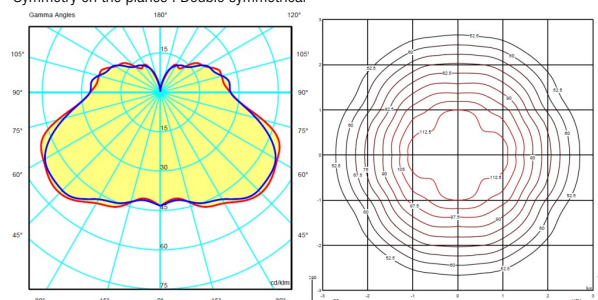

Certificates

