



G

8,3

575


3000K

25 000h

Dimmable

5
YEARS
GUARANTEE

General Data

Article No.	43720055
Code	RL-PAR16 80 DIM 930/WFL
Product EAN	4008597200557
Customs tariff no.	85395200
Box quantity (pcs.)	10
EAN Box	4008597600555
Gross weight of box in kg	0.683
Length of box in m	0.255
Width of box in m	0.107
Height of box in m	0.072
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Weight	56 g
Product status	 Active

Electric Parameters

Nominal power	8,3 W
Rated wattage	8.3 W

Electric Parameters

Weighted energy consumption in 1,000 hours	9 kWh
Power factor	0.7
[Netzspannung/Nicht direkt an die Netzspannung angeschlossen]	MLS
Nominal voltage	220-240 V
Voltage type	AC
Nominal current	46-46 mA
Nominal current (mA)	46 mA
dimmable	Yes

Light Application Parameters

Luminous flux	575 lm
Rated lamp luminous flux	575 lm
Luminous flux	575-575 lm
Luminous intensity	840 cd
Beam angle	36 °
Luminous efficiency	69 lm/W
Color temperature	3000 K
Color coordinate X	0.430
Color coordinate Y	0,393
Color rendering index Ra nominal	90
Color rendering index R9	1
Color Stability	≤ 5 sdc _m
CC570111	DLS
Flicker	0.2
Stroboscopic effect	0.4

Service Life

Average nominal lifespan	25000 h
Mean service life	25000 h
No. switching cycles	100000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %
Guarantee up to	5 years

Specification

Energy Label A to G	G
Diameter	50 mm
Length max.	52 mm
Length	52 mm
Burning position	beliebig
Mercury content	0.0 mg
Lamp shape	Reflector
Base	GU10
Colour	White
Weight	56 g

Notes on Operation

Degree of protection (IP)	IP20
Burning position	beliebig
Ambient temperatures	-20 ... +40 °C

Notes

PAR16-LED for exchange with halogen lamps, warm white light, glass bulb, dimmable, base GU10. LED light does not contain UV or IR radiation.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.


The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin. Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

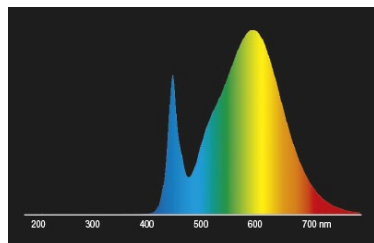

LED Retrofit reflector lamps 3000K

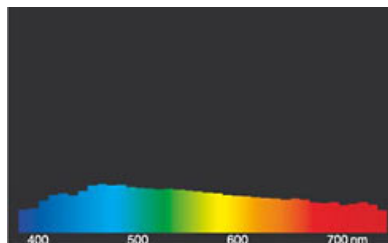

daylight(D 65)

Special features



LED Star PAR16

RL-PAR16 80 DIM 930/WFL

Radium

General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.