

General Data

Article No.	43519239
Code	RL-MR16 35 DIM 927/WFL
Product EAN	4008597192395
Box quantity (pcs.)	10
EAN Box	4008597492396
Gross weight of box in kg	0.773
Length of box in m	0.26
Width of box in m	0.11
Height of box in m	0.07
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Product status	Active

Electric Parameters


Nominal power	6,3 W
Rated wattage	CC08192
Weighted energy consumption in 1,000 hours	6,3 kWh
Power factor	≥ 0.5
Nominal voltage	12-12 V
Voltage type	AC
Nominal current (mA)	950 mA
dimnable	Yes

Light Application Parameters

Rated lamp luminous flux	350 lm
Luminous flux in 90°-sector	350 lm
Luminous intensity	900 cd
Beam angle	36 °
Luminous efficiency	55,56 lm/W
Colour temperature	2700 K
Colour rendering index Ra	≥ 90
Colour rendering index Ra nominal	97
Colour Stability	≤ 3 sdcn

Service Life

Mean service life	40000 h
Average nominal lifespan	40000 h
No. switching cycles	100000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %

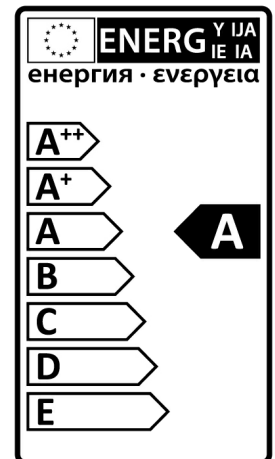

Specification

Energylabel from 2013	A
Diameter max.	51 mm
Diameter	51 mm
Length max.	53 mm
Length	53 mm
Burning position	beliebig
Mercury content	0.0 mg
Lamp shape	Reflector
Finish	glass
Base	GU5.3
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Ambient temperatures	-20...+40 °C
Ambient temperature range operation	-20...+40 °C

Notes

MR16-LED, exchange with 12V halogen lamps, warm white light, glass bulb, dimmable, base GU5,3. LED light does not contain UV or IR radiation.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes**Base****Special features****General notes**

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

All technical data without guarantee.