

BEGA**33 328**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

Product data sheet

Application

Shielded ceiling, wall and pillar luminaire with high protection class for a variety of lighting tasks. A luminaire made of die cast aluminium and impact resistant crystal glass.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 BEGA Unidure® coating technology
 Crystal glass, white inside
 2 mounting holes \varnothing 5.5 mm
 Distance apart 144 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5[□]
 Earth conductor connection
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 BEGA Thermal Switch®
 Temporary thermal shutdown to protect temperature-sensitive components
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK08
 Protection against mechanical impacts < 5 joule
 – Safety mark
 – Conformity mark
 Weight: 2.8 kg

Lamp


Module connected wattage 3.8 W
 Luminaire connected wattage 4.9 W
 Rated temperature $t_a = 25\text{ }^\circ\text{C}$
 Ambient temperature $t_{a\text{ max}} = 55\text{ }^\circ\text{C}$

33 328 K3

Module designation LED-0263/830
 Colour temperature 3000 K
 Colour rendering index CRI > 80
 Module luminous flux 755 lm
 Luminaire luminous flux 409 lm
 Luminaire luminous efficiency 83,5 lm/W

33 328 K4

Module designation LED-0263/840
 Colour temperature 4000 K
 Colour rendering index CRI > 80
 Module luminous flux 780 lm
 Luminaire luminous flux 423 lm
 Luminaire luminous efficiency 86,3 lm/W

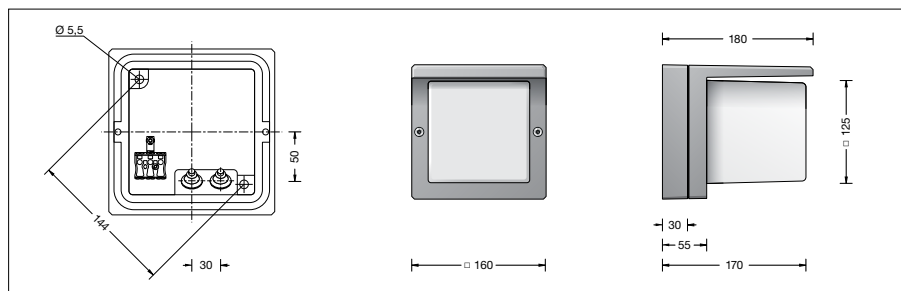

Service life · Ambient temperature

Rated temperature $t_a = 25\text{ }^\circ\text{C}$
 LED psu: > 50,000 h
 LED module: > 200,000 h (L80 B50)
 100,000 h (L90 B50)
 Ambient temperature $t_{a\text{ max}} = 55\text{ }^\circ\text{C}$ (100 %)
 LED psu: 50,000 h
 LED module: 107,000 h (L80 B50)

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Inrush current

Inrush current: 7 A / 112 μs
 Maximum number of luminaires of this type per miniature circuit breaker:
 B 10A: 38 luminaires
 B 16A: 61 luminaires
 C 10A: 64 luminaires
 C 16A: 102 luminaires

Article No. 33 328

LED colour temperature optionally 3000K or 4000K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**
 Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

