



## BOXY R OK 92733 DIM8 B-MMAT

251 77 811 922 ED8 B-MMAT


AVAILABLE IN

**BLACK-BLACK** 251 77 811 922 ED8 B-B

**BLACK-GOLD MATT** 251 77 811 922 ED8 B-MMAT

**WHITE-BLACK** 251 77 811 922 ED8 W-B

**WHITE-WHITE** 251 77 811 922 ED8 W-W

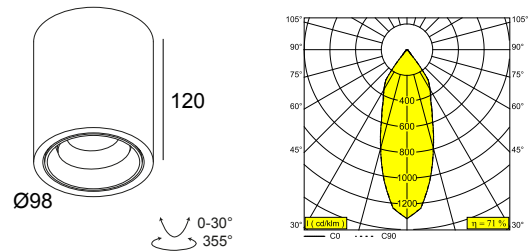

 [View on website](#)

General info	
<b>LOCATION</b>	indoor
<b>INSTALLATION</b>	Ceiling Surface mounted
<b>INGRESS PROTECTION</b>	IP20
<b>WEIGHT (KG)</b>	0.9
<b>ADJUSTABILITY</b>	0° to 30° swiveling, 355° rotatable
<b>INFORMATION</b>	REFLECTOR FL-33° INCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info	
<b>ELECTRICAL</b>	220-240V / 50-60Hz
<b>CLASS</b>	I
<b>POWER SUPPLY INCLUDED</b>	YES
<b>DIM TYPE</b>	mains (phase cut-off)
<b>ENERGY CLASS</b>	D
<b>CERTIFICATES</b>	ENEC

Lightsource info	
<b>LIGHTSOURCE NAME</b>	LED
<b>LIGHTSOURCE</b>	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
<b>TM-30 VALUES</b>	Rf: 89 / Rg: 100
<b>SDCM</b>	SDCM1
<b>RISKGROUP</b>	RG1
<b>LM80</b>	L90B10 > 50000
<b>LED TECHNICS (LIGHT SOURCE)</b>	1041lm // 8,6W // 121lm/W
<b>LED TECHNICS (LUMINAIRE)</b>	743lm // 10W // 75lm/W

For detailed installation instructions, please consult the manual: [251\\_77\\_811\\_XXX\\_HAND.pdf](#)

## **BOXY R OK 92733 DIM8 B-MMAT**

251 77 811 922 ED8 B-MMAT

### **FINISH YOUR SPECIFICATION**

#### **Control gear, ballast and transformers**

---



**300 90 004 ED8** WIRELESS CONTROL DIM8



Notes: